
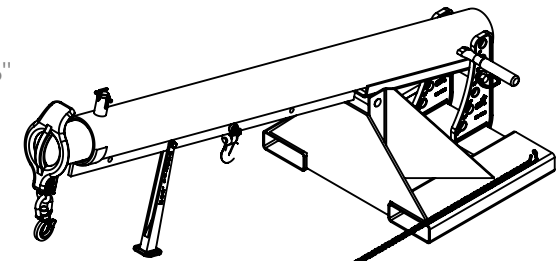


ORBIT TELESCOPING BOOM - LM-OBT-4-24

APPROX WEIGHT: 434.27 lbs.
DOES NOT INCLUDE WEIGHT OF POWER OR PACKAGING!!!

STANDARD FEATURES

- MODEL NUMBER: LM-OBT-4-24
- CAPACITY: 4,000 LBS
- LOST LOAD - 445 LBS
- MAXIMUM TILTING ANGLE: 37°
- OVERALL HEIGHT - 27 11/16"
- HEIGHT (MAX. TILTED) - 99 1/2"
- LENGTH (RETRACTED) - 86 5/8"
- LENGTH (EXTENDED) - 146 5/8"
- STORAGE LENGTH (RETRACTED)- 83 7/8"
- OVERALL WIDTH - 32"
- 36" MINIMUM HOOK POINT
- 144" MAXIMUM HOOK POINT
- HOOK HEIGHT - 6 7/16"
- HOOK HEIGHT (MAX. TILTED) - 78 5/16"
- USABLE FORK POCKET - 2 1/2 x 7 1/2
- 24" FORK POCKET CENTERS
- EFFECTIVE THICKNESS: LESS THAN 1"

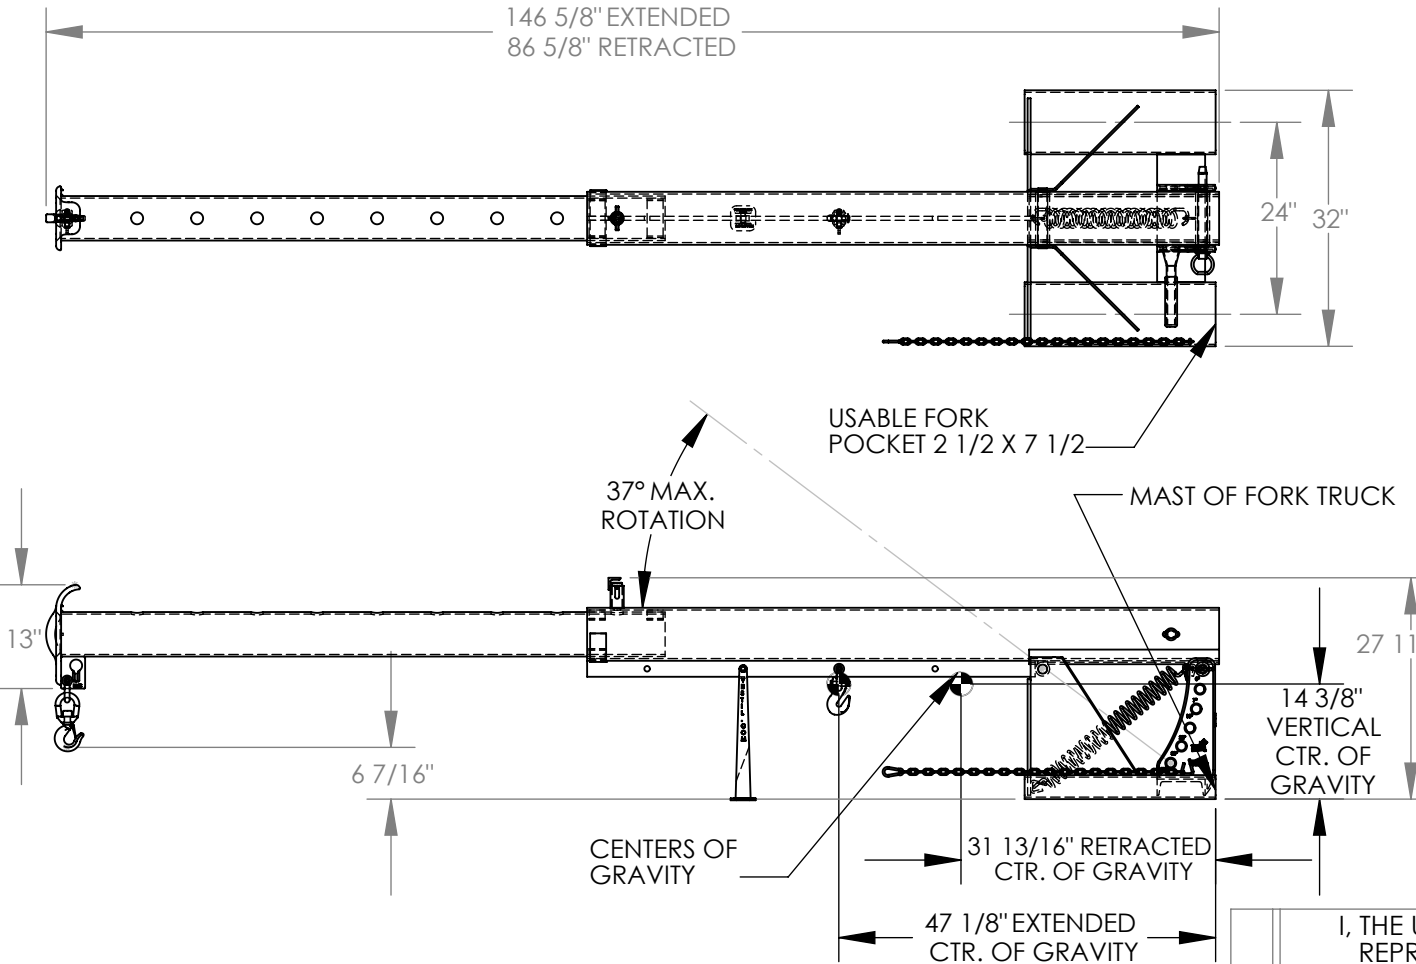

3D ROTATED VIEW SHOWN FOR REFERENCE

*--MAXIMUM SINGLE HOOK CAPACITIES

DISTANCE	36"	48"	60"	72"	84"	96"	108"	120"	132"	144"
CAPACITY	4000	3750	3500	3250	3000	2750	2500	2250	2000	1750

ALL GRAPHICS PROVIDED ARE FOR REFERENCE ONLY. IF CERTAIN DIMENSIONS ARE CRITICAL PLEASE VERIFY THOSE DIMENSIONS WITH YOUR SALESPERSON

NEVER EXCEED LOAD CENTER RATING PER FORK TRUCK MANUFACTURER'S GUIDELINES. DO NOT USE THIS FORK TRUCK ATTACHMENT IF LOAD WILL EXCEED FORK TRUCK MANUFACTURER'S LOAD CENTER RATING.

SPECIAL FEATURES

NONE

A P P R O V A L

I, THE UNDERSIGNED, AGREE THAT THE PRODUCT AS REPRESENTED SATISFIES DESIGN AND DIMENSION REQUIREMENTS. I ALSO ACKNOWLEDGE MY DUTY TO CONFIRM PRODUCT AND INSTALLATION COMPLIANCE WITH ALL APPLICABLE FEDERAL, STATE AND LOCAL REGULATIONS AND STANDARDS.

ALL SPECIAL UNITS ARE NON-RETURNABLE
[] As drawn [] As marked

Signed: _____ Date: _____

LEAD TIME WILL START UPON RECEIPT OF SIGNED APPROVAL DRAWING

DISTRIBUTOR'S NAME: VESTIL MANUFACTURING

P.O.# X

W.O.# X

DRAWN BY: ND DATE: 7/2/07 SALES: X

REFERENCE: X SCALE: 1:24 FILE NAME:

QUOTED LEAD TIME: X QUOTE # X 08-007-140